

EA20 EA25 electronic safe operating instructions

Before use the safe, please install the safe on the floor or against wall by provided screws in packing!

1. Change the code

- A. With door open, locate the red button on the back of door near hinge and press. you will hear 2 beeps and yellow light on (10 seconds)
- B. Input a new code of 3 to 8 digits, then press "B" button.
The storage of the new code will be confirmed by two beeps

2. Close the safe.

Turn the knob counter-clockwise, the mechanism will automatically lock the safe.

3. Open the safe

- A. Input your code, and then press the "B" button, the green light will turn on.
- B. Turn the knob clockwise within 5 seconds, the door is opened.
- C. Each key being pressed is indicated with a buzzer and a yellow flashing light. if the entered code is invalid then the yellow light will flash and the buzzer will quickly beep and the user should enter the correct one again

CAUTION: Entering an incorrect code 3 times will freeze the system for 20 seconds

4. Change the Battery


If both the red and green lights are on while safe opened, this indicates that the batteries must be changed. To be sure the batteries are correctly installed please test *before* you close the safe's door. Please use 4 x AA Alkaline Battery only.

5. Use Emergency Key (Override Key)

In case code get lost, or battery used down, For EA and EH safe, remove the center cover of the keypad, you will find a tubular lock, use the override key to open the safe. For ES safe, remove the small logo, unscrew the screw there, take off the small cover that holds the keypad, you will find a lock to open the safe. Please don't keep this key in this safe. The safe serial number is stick near the override lock, factory can copy this key by this number if it get lost.



The red button

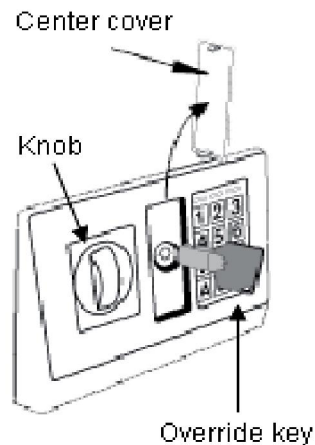

EA SAFE